


TU & TUF Series

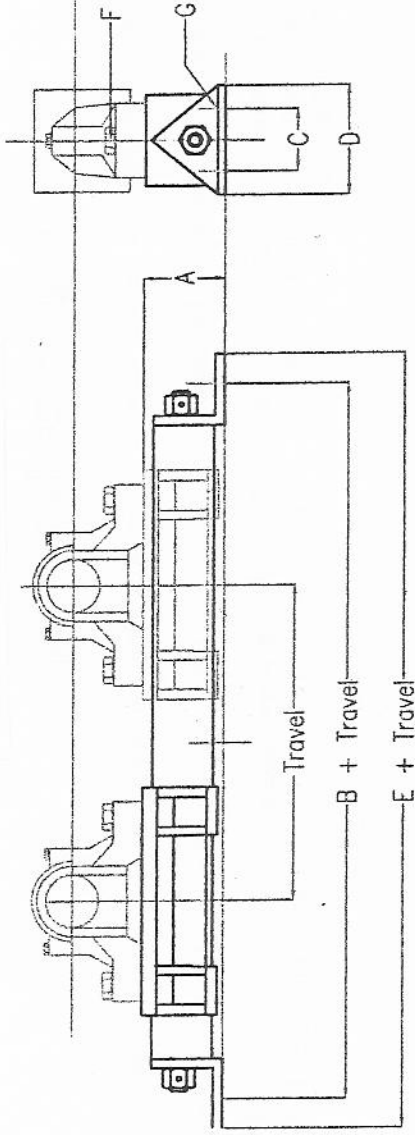

"HEAVY DUTY" Pedestal Take-up

SHAFT	TU/TUF	A	B	C	D	E	F	G	WEIGHT BASIC, #	Plus PER 6 IN.
2 7/16	515	5	18 1/2	4	6 1/2	21	7	3/4	75	5
2 15/16	517	5	18 1/2	4	6 1/2	21	7	3/4	75	5
3 7/16	520	6	23	6 1/2	9	26	9	3/4	144	7
3 15/16	522	6	23	6 1/2	9	26	9	3/4	144	7
4 7/16	526	6	26 5/8	6 1/2	9	29 5/8	9	3/4	152	7
4 15/16	528	6	26 5/8	6 1/2	9	29 5/8	9	3/4	152	7
5 3/16	530	7	31 1/2	8	11	35 1/2	11	1	169	12
5 7/16	532	7	31 1/2	8	11	35 7/8	11	1	169	12
5 15/16	534	7	33 7/8	8	11	37 7/8	11	1	176	12
6 7/16	536	7	35 3/8	8	11	39 3/8	11	1	181	12
6 15/16	538	7	36 1/8	8	11	40 1/8	11	1 1/4	184	12

Saddles are drilled and tapped for 2 bolt blocks (TU), or 4 bolt blocks (TUF).

Saddle castings are ductile iron, blanchard ground for bearing seat.

Threaded rod is UNC, Series 500, three-step zinc chromate plated for 500 hours salt-spray test.

Travel lengths are available in increments of 6 inches.

Nomenclature. TU or TUF followed by size number for shaft size, followed by travel (inches).

Stainless steel threaded rod available at extra cost by adding SS to number. Example TUF522 X 12SS.

1:520

Catalogue Page 3

5-05

Series TU and TUF

H229
R2

**PT Manufacturing
& Imports Inc.**
info@pt-manufacturing.com